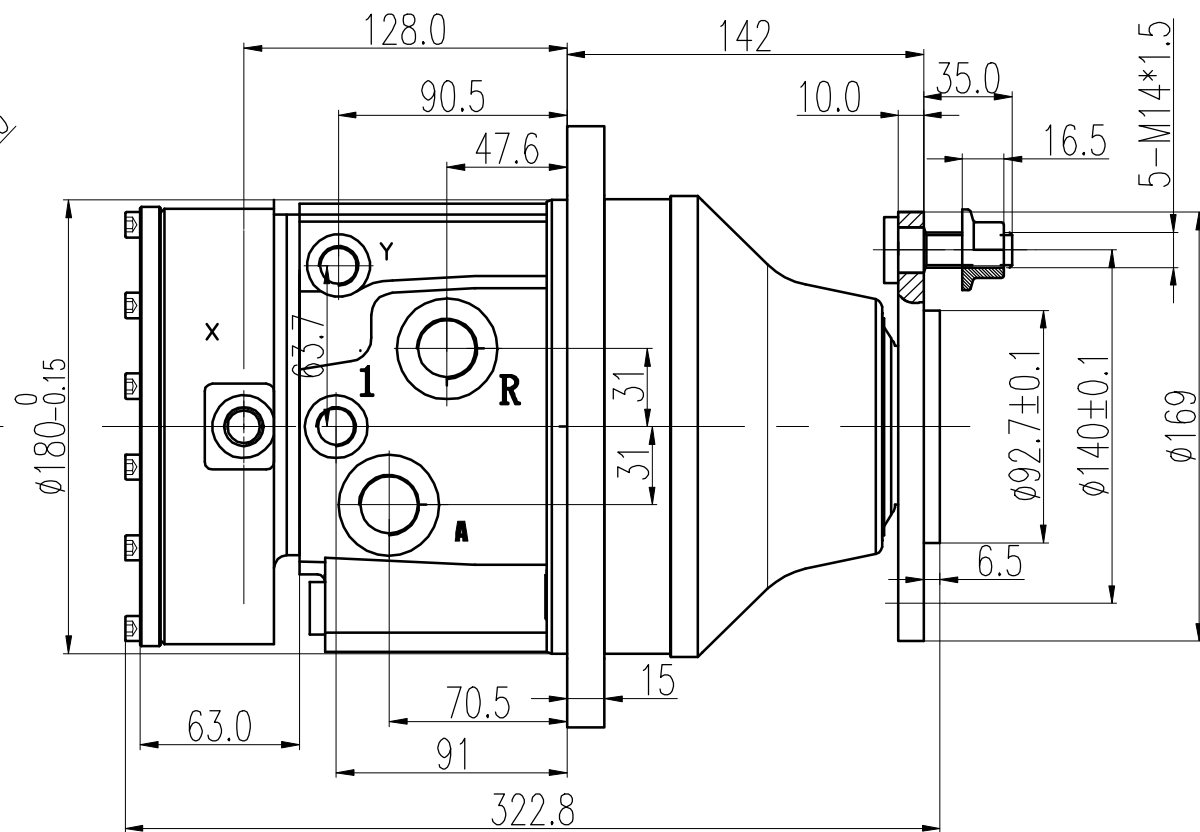


Displacement	400 ml/r	200 ml/r
Max power	20 kW	10 kW
Rate pressure	25 MPa	25 MPa
Max pressure	35 MPa	35 MPa
Rate torque (25MPa)	1433 N.m	716 N.m
Rate speed	80 rpm	120 rpm
Speed range	0-200 rpm	0-250 rpm
Brake torque	2500 N.m	2500 N.m
Brake release pressure (min)	1.2 MPa	1.2 MPa
Brake release pressure (max)	3 MPa	3 MPa
Brake bearing pressure	5 MPa	5 MPa

Port		
R	Port R pressurized-cw	BSPP1/2"
A	Port A pressurized-cw	BSPP1/2"
1	Dia in ports 1	BSPP1/4"
Y	Variable oil Y	BSPP1/4"
X	Brake ports	BSPP1/4"

Rev.	Description	Date	
		DESIGNED BY	
		CHECK BY	
DESCRIPTION		TMS03-400G-L12-M-CY-Z05	
REPRODUCTION NOT PERMITTED ALL RIGHT RESERVED			

Do not try to interpret the technical drawing, please contact us if you are in any doubt about it.

REPRODUCTION NOT PERMITTED ALL RIGHT RESERVED