



TAIZHOU SUNNY AGRICULTURAL MACHINERY CO.,LTD
台州信溢农业机械有限公司

CCC UL CE ISO9001 ISO14001

TAIZHOU SUNNY AGRICULTURAL MACHINERY CO.,LTD.
 Add: Hengjiezhen Ind. Zone, Luqiao District, Taizhou, Zhejiang, China.
 Tel: 86-576-89221811 89221822 89221833 89221866 89221677
 Fax: 86-576-89221777 P.C.: 318056
 Http: www.cn-sprayers.com
 E-mail: info@chinasprayers.com (overseas)

台州信溢农业机械有限公司
 地址: 浙江省台州市路桥区横街镇工业区
 电话: 0576-89221698 89221668
 传真: 0576-89221777 邮编: 318056
 网址: www.chinasprayers.com
 E-mail: sales@chinasprayers.com (国内)



www.cn-sprayers.com

SUNNY AGRICULTURAL MACHINERY

www.chinasprayers.com



企业介绍 BRIEF INTRODUCTION

台州信溢农业机械有限公司是法美特集团核心企业，是一家集研发、生产、销售为一体的专业农林植保机械现代化龙头骨干企业。公司占地面积40,000平米，建筑面积35,000平米。现有员工600多人，其中专业技术人员60多人。公司装备世界先进的生产加工设备300余台套，现代化流水线12条，以及完善的检验检测设备。

公司秉承“以质量求生存，以创新求发展，合作共赢”的经营理念，和“简单、给予、品质”的企业核心价值观，不断加强企业文化建设，全面实施以人为本的管理理念。公司自2002年成立以来依靠科技进步和科学管理，先后通过ISO9001:2008国际质量管理体系认证；ISO14001国际环境管理体系认证、ISO18000职业健康安全体系认证，国家计量检测体系认证、企业标准化良好行为AAA级认证。公司承担多项国家863计划项目和国家支撑项目的国家级科研课题，并且参与或直接起草了多项喷雾器的行业标准。

公司产品包括手动喷雾器、机动喷雾器、喷雾喷粉机，烟雾机，大型风送果园喷雾机，喷杆式农田喷雾机等10几个系列200多个品种，其中年产手动喷雾器2,000,000台，机动喷雾器200,000台。公司多款产品荣登农业部补贴推广产品目录和享受国家农机购置补贴。部分产品通过GS、CE、ROHS、UL、CCC、等国际国内质量和安全认证。产品90%以上出口，远销欧美、东南亚、中东、非洲等100多个国家和地区，深受客户好评。

Taizhou Sunny Agricultural Machinery Co., LTD., the core enterprise of Farmate Group, is a professional, leading and modern enterprise integrated with development, manufacture and sales of agricultural and horticultural plant protection machinery. The company occupies an area of 40,000 square meters, construction area of 35,000 square meters. It has over 600 staff members including over 60 senior engineers and technicians. It possesses over 300 sets of world advanced manufacturing equipment, 12 modernized production lines, and complete inspection and measuring means.

Adhering to the management principle of "Striving for Survival by Quality, Seeking Development by Innovation, Win-win Cooperation" and the core view of values of "Simplicity, Giving, Quality", the company continually strengthens the building of enterprise culture, comprehensively implements the people-oriented management philosophy. Since its foundation in 2002, relying on technological progress and scientific management, the company has successively passed the ISO9001:2008 international quality management system certification; ISO14001 international environmental management system certification, ISO18000 occupational health and safety system certification, the national measuring and inspection system authentication, the enterprise standardization good practice AAA grade authentication. The company has undertaken a number of projects of State "863" Scheme and national level scientific research projects supported by the state. And also the company has drafted a number of national industry standards for spraying machines.

The main products of our company include manual sprayers, power sprayers, mist-dusters, thermal foggers, large-sized air blast orchard sprayers, field boom sprayers, etc., totally over 10 series and more than 200 models, with the annual capacity of 2,000,000 units of manual sprayers, 200,000 units of power sprayers. Some products have passed through the GS, CE, Rohs, UL, CCC and other international and national quality and safety certifications. Over 90% of our products are exported and deeply praised by clients from all over the world, covering the markets of more than 100 countries and regions, such as Europe, America, Southeast Asia, Middle East, Africa and so on.

We sincerely welcome all friends at home and abroad to visit us for common development.



SUNNY AGRICULTURAL MACHINERY
www.chinasprayers.com





FACTORY SCENE

TAIZHOU SUNNY AGRICULTURAL MACHINERY CO.,LTD.





SALES NETWORK



TRADE SHOWS



H O N O R C E R T I F I C A T E

荣誉证书 ©®®®®® ISO9001 ISO14001



NS-1.3A



NS-1.5A



NS-2A



NS-5N

技术参数 SPECIFICATION

型号Model	NS-1.3A	NS-1.5A	NS-2A
净重Net weight (kg)	0.28	0.32	0.34
包装尺寸Packing meas (cm)	66x45x29	70x54x31	72x58x34
装箱数Pcs/ctn	25	25	25



1. 铜喷头 Brass spray lance
2. 铜喷头 Brass spray nozzle
3. 可调喷头 Nozzle adjustable
4. 压力表 Pressure gauge
5. 安全阀 Safety valve
6. 喷杆固定扣 Spray lance fixer



NS-3



NS-5A



NS-5F



NS-8

技术参数 SPECIFICATION

型号Model	NS-5N	NS-3	NS-5A/F	NS-8
桶身尺寸	直径Dia.=185mm	直径Dia.=170mm	直径Dia.=170mm	直径Dia.=200mm
Dimension(mm)	高度 Height=395mm	高度 Height=450mm	高度 Height=550mm	高度 Height=600mm
桶身容量Total tank capacity (L)	5	5	8	11
额定容量 Rated filling capacity (L)	3	3	5	8
最大工作压力Max.working pressure (bar)	3.0	3.0	3.0	3.0
最大工作温度Max.working temperature (°C)	40	40	40	40
喷头Nozzle	1mm孔径圆锥形喷头, 1mm hollow conical nozzle	1mm孔径圆锥形喷头, 1mm hollow conical nozzle	1mm孔径圆锥形喷头, 1mm hollow conical nozzle	1mm孔径圆锥形喷头, 1mm hollow conical nozzle
净重Net weight (kg)	1.05	1.38	1.75	2.1
包装尺寸Packing meas (cm)	75x38x41.5/8pcs/ctn	72x36x47/8pcs/ctn	72x36x57(54)/8pcs/ctn	81x41x61/8pcs/ctn



FM-5A



FM-7A



FM-10A



SP-10W



SP-15B

技术参数 SPECIFICATION

型号Model	FM-5A	FM-7A	FM-10A	SP-10W	SP-15B
桶身容量Total tank capacity (L)	5.9	7.9	10.5	10	15
额定容量 Rated filling capacity (L)	5	7	10	/	/
气室容量 Air chamber capacity (L)	/	/	/	0.76	0.76
最大工作压力Max.working pressure (bar)	3.0	3.0	3.0	6-7	6-7
净重Net weight (kg)	1.6	1.75	2.25	2.45	3.05
包装尺寸Packing meas (cm)	72x36x50.5/8pcs/ctn	74x37.5x55/8pcs/ctn	83x42x59/8pcs/ctn	39x22x56.5	35.5x25.9x66.3



HAND SPRAYER



FM-12



FM-16



FM-20



FM-16V



FM-16VA



FM-20VS



技术参数 / SPECIFICATION

型号Model	FM-12	FM-16	FM-20	FM-16V	FM-16VA	FM-20VS
桶身容量Tank capacity (L)	12	16	20	16	16	20
气室容量 Air chamber capacity (L)	0.7	0.9	0.9	0.9	0.9	0.9
工作压力Working pressure (bar)	2-3	2-3	2-3	2-3	2-3	2-3
最大压力Max.pressure (bar)	10	10	10	10	10	10
净重Net weight (kg)	3.0	3.2	3.4	3.2	3.2	3.4
包装尺寸Packing measurement (cm)	36x17x52	36x20x51	37.5x21x51	38.5x17.5x57.5	38.5x17.5x57.5	40x21.5x52



NS-16



NS-16A



双重排喷头
Two nozzle spray lance boom N.901



四连排喷头
Four nozzle spray lance boom N.902



NS-16AS



NS-20AS

- Portable structure, scientific design of tank with arc shape.
桶身设计符合人体学原理，操作轻松舒适。
- Bigger air chamber capacity, quick pressure arising.
气室容量大，加压快，容易操作。
- Rocker rod left and right interchangeable.
可左右手操作。



技术参数 / SPECIFICATION

型号Model	NS-16(A/AS)	NS-20AS
桶身容量Tank capacity (L)	16	20
气室容量 Air chamber capacity (L)	0.9	0.9
工作压力Working pressure (bar)	2-3	2-3
最大压力Max.pressure (bar)	10	10
净重Net weight (kg)	3.2	3.4
包装尺寸Packing measurement (cm)	38.5x18x57.5	40x21.5x52.5



HAND SPRAYER



NS-12



NS-16B



NS-20



NS-20A



NS-20X




NS-20XP



- ④ PVC增强胶管，玻纤喷杆，高密度PE桶身。
Reinforced hose Fiberglass wand. Poly tank.
- ④ 容易操作加压快捷，气室容量大。
Easy operating. Quick pressure arising.
- ④ 配圆形和扇形两种喷头。
Cone nozzle and fan nozzle are supplied with unit.
- ④ 可选择金属喷杆和喷头。
Metal lance and nozzle optional.

技术参数 SPECIFICATION

型号Model	NS-12	NS-16B	NS-20	NS-20A	NS-20X	NS-20XP
桶身容量Tank capacity (L)	12	16	20	20	20	20
气室容量 Air chamber capacity (L)	0.7	0.9	0.9	0.9	0.9	0.9
工作压力Working pressure (bar)	2-3	2-3	2-3	2-3	2-3	2-3
最大压力Max.pressure (bar)	10	10	10	10	10	10
净重Net weight (kg)	3.0	3.2	3.4	3.4	6.0	5.0
包装尺寸Packing measurement (cm)	35x19x51	36x20x53.5	36x21x56	36x21x56	39x21x53	43x23x53

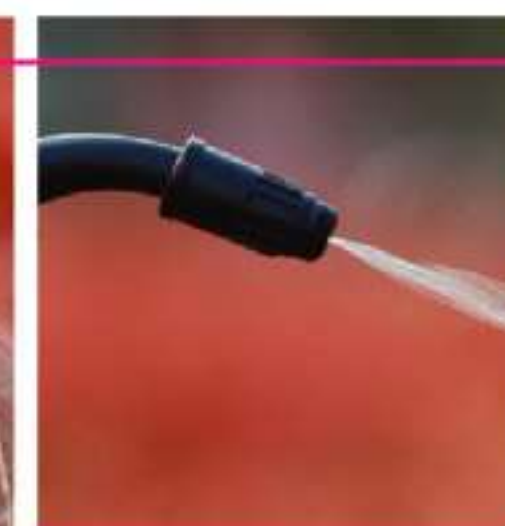

NS-15



NS-15A



NS-15B



NS-15K



NS-15S

技术参数 SPECIFICATION

型号Model	NS-15(A/B)	NS-15K	NS-15S
桶身容量Tank capacity (L)	15	15	15
气室容量 Air chamber capacity (L)	1.0	1.0	1.0
工作压力Working pressure (bar)	1-4	1-4	1-4
最大压力Max.pressure (bar)	10	10	10
净重Net weight (kg)	3.3	3.3	3.7
包装尺寸Packing measurement (cm)	36x21.5x51.2	38x22.5x54	36.2x21.5x51.2



GRANULE APPLICATOR ELECTRIC SPRAYER



GS-10




GS-2



3WCD-4

技术参数 / SPECIFICATION

型号Model	GS-10	GS-2
容量 Capacity (L)	10	2
净重Net weight (kg)	2	0.75
包装尺寸Packing measurement (cm)	48x32.5x25.5	68x32.5x32 6pcs/ctn

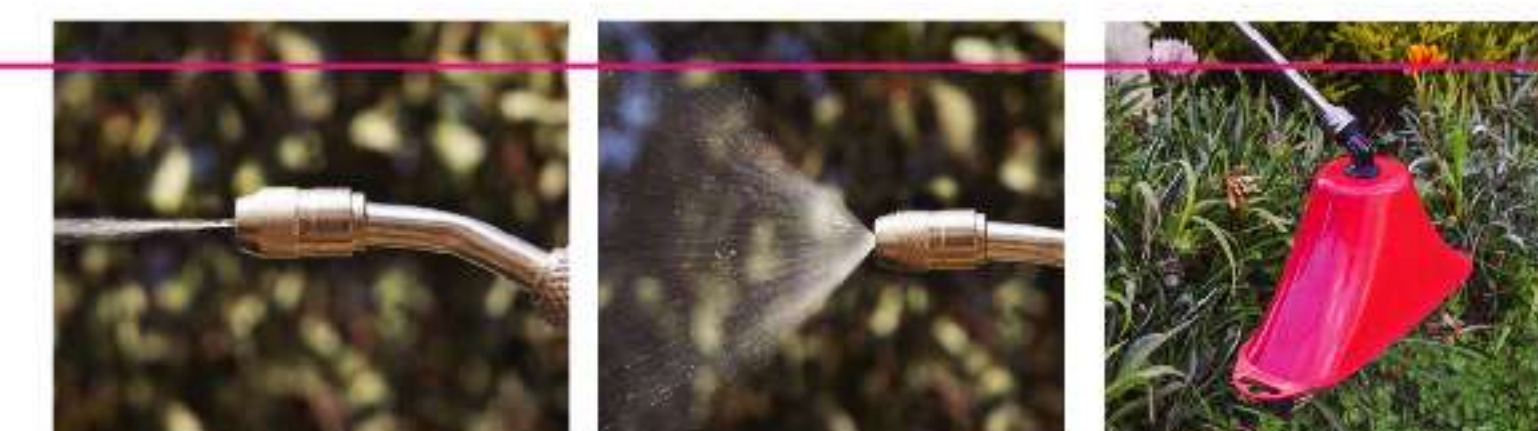

ELECTRIC SPRAYER



BBS1610



NBS1610



BBS2010



ATV-15



ATV-25



BBS-16



BBS-18



DBF18P

技术参数 / SPECIFICATION

型号Model	BBS-16	BBS-18	DBF18P	3WCD-4
桶身容量Tank capacity (L)	16	20	18	4
电池Battery	12V,7-10Ah Lead-acid/Lithium	12V,7Ah Lead-acid/Lithium	12V,8Ah Lithium	/
充电器Charger	100-240V,50/60Hz input, 12V DC 1700ma output			220V,50Hz
泵Pump (Diaphragm)	12V, 3L/min., 60PSI demand switch.			Discharge capacity 5-25L/hour. Particle: 15-50µm.
工作压力Working pressure (bar)	2.8-3.8	2.8-3.8	2.8-3.8	/
净重Net weight (kg)	7.9/5.1	6.8/5.1	5.1	4
包装尺寸Packing measurement (cm)	38x25x49	37x25x53	35x25x57	35.5x27x47.5

技术参数 / SPECIFICATION

型号Model	BBS1610	NBS1610	BBS2010	ATV-15	ATV-25
桶身容量Tank capacity (L)	18	16	20	55	100
电池Battery	12V,8Ah Lead-acid	12V,8Ah Lead-acid	12V,8Ah Lithium	12V,3.2Ah lead-acid	
充电器Charger	100-240V,50/60Hz input, 12V DC 1700ma output			100-240V,50/60Hz input, DC12V 0.7A output.	
泵Pump (Diaphragm)	12V, 2.5L/min.,60PSI demand switch.			12V,2.6L/min. 60PSI demand switch	12V,5.3L/min. 60PSI demand switch
工作压力Working pressure (bar)	2.0-4.0	2.0-4.0	2.0-4.0	3.0-4.0	3.0-4.0
净重Net weight (kg)	6.5	7.5	5.3	5.4	9.0
包装尺寸Packing measurement (cm)	33.2x21.5x55.2	39.2x21.6x64.7	38.5x28x57.5	71.5x42.5x36	88.5x47x43.5



KNAPSACK POWER SPRAYER



TF-900



TF-800



TF-820

TF-825



TF-767



TF-708



TF-715

技术参数 / SPECIFICATION

型号Model	TF-900	TF-800	TF-820/825	TF-767	TF-708	TF-715
药箱容量Tank capacity (L)	25	25	20/25	25	20	15
泵Pump type	高压泵High pressure plunger pump (nylon / brass)					
工作压力Working pressure (bar)	5-25	5-25	5-25	5-25	5-25	5-25
最大压力Max pressure (bar)	35	35	35	35	35	35
吸水量Suction volume (L)	10	10	10	10	10	10
喷雾量Spray volume (L)	3-8	3-8	3-8	3-8	3-8	3-8
发动机Engine type	TU-26	TU-26	TU-26	TU-26	TU-26	TU-26
排量Displacement (cc)	26	26	26	26	26	26
启动方式Starting system	反冲式 Recoil					
化油器Carburetor	膜片式Diaphragm type					
燃油Fuel	汽油混合二冲程机油Mixed gasoline 25:1					
燃料容量 Fuel tank capacity (L)	0.6	0.6	0.6	1.1	1.1	1.1
净重Net weight (kg)	9.5/11	9.5/11	9.0/10.5(9.5/11)	9.5/11	9.0/10.5	9.0/10.5
包装尺寸Packing measurement (cm)	49x35x65	44x35x62	43x35x61 / 45x35x69	43x35x69	42x35x67	42x33x65.3



1. 1.2M高压管 2. 把手 3. 球阀 4. 喷杆 5. 2-孔线杆 6. 火花塞套筒 7. 混油壶 8. 说明书 9. 喷枪
1. 4ft Spray Hose 2. handle 3. Ball Cock 4. Spray Rod 5. 2-hole Fan Spray Nozzle 6. Spark Plug Wrench 7. Oil Mix Tank 8. Instruction Book 9. Spray Gun



KNAPSACK POWER SPRAYER



TF-900A



TF-800A



FM820



TF-900B4



TF-825B4



FM820PP4

技术参数 / SPECIFICATION

型号Model	FM820	TF-900A	TF-800A	TF-825B4	TF-900B4	FM820PP4
药箱容量Tank capacity (L)	22	25	25	25	25	22
泵Pump type	高压泵High pressure plunger pump (nylon / brass)					
工作压力Working pressure (bar)	5-25	5-25	5-25	5-25	5-25	5-25
最大压力Max pressure (bar)	35	35	35	35	35	35
吸水量Suction volume (L)	10	10	10	10	10	10
喷雾量Spray volume (L)	3-8	3-8	3-8	3-8	3-8	3-8
发动机Engine type	TU-26	Mitsu TU-26	Mitsu TU-26	135F(GX25/35)	140F(GX25/35)	140F(GX35)
排量Displacement (cc)	26	26	26	26/37.7	26/37.7	37.7
启动方式Starting system	反冲式 Recoil					
化油器Carburetor	膜片式Diaphragm type					
燃油Fuel	汽油混合二冲程机油Mixed gasoline 25:1					
燃料容量 Fuel tank capacity (L)	0.6	0.6	0.6	0.55/0.65	0.55/0.65	0.65
净重Net weight (kg)	9.5/10	9.5/11	9.5/11	9.5/11	9.5/11	10
包装尺寸Packing measurement (cm)	39x33x69	49x35x65	44x35x62	45x37x69	49x37x65	39x37x69

适用范围 / APPLICATION

本产品适用于环境消毒，蔬菜，水稻，各种瓜果，咖啡等农作物杀虫。
Spray treatment for pest control in agricultural plants such as rice, vegetable, melon, coffee and fruit trees, etc. Environmental disinfection, sanitation and epidemic prevention.



POWER SPRAYER



TF-600



TF-600B



TF-600R



TF-600B4



TF-600M

技术参数 SPECIFICATION

型号Model	TF-600	TF-600B	TF-600R	TF-600B4	TF-600M
泵Pump type	高压泵High pressure plunger pump (nylon / brass)				
工作压力Working pressure (bar)	5-25	5-25	5-25	5-25	5-25
最大压力Max pressure (bar)	35	35	35	35	35
吸水量Suction volume (L)	10	10	10	10	10
喷雾量Spray volume (L)	3-8	3-8	3-8	3-8	3-8
发动机Engine type	TU-26	TU-26	TU-26	140FA(GX35)	550W motor 220V 50Hz
排量Displacement (cc)	26	26	26	37.7	
启动方式Starting system	反冲式 Recoil				/
化油器Carburetor	膜片式Diaphragm type				/
燃油Fuel	汽油混合二冲程机油Mixed gasoline 25:1			gasoline	/
燃料容量 Fuel tank capacity (L)	0.6	0.6	0.6	0.6	/
净重Net weight (kg)	9.5	11	11/13.5	12.5	15
包装尺寸Packing measurement (cm)	34x31x32	34x34x32.5	54x35x37	35x34x32.5	31.5x30x27.5

高压喷雾泵

HIGH PRESSURE PUMPS



B25

(Greaseless nylon pump)



B35



TFTP1B

(Greaseless brass pump)



TFTP1

(Heavy duty brass pump)



TFTP4



POWER SPRAYER



CCC UL CE ISO9001 ISO14001



TF-650



TF-650R



AT-30ER

技术参数 SPECIFICATION

型号Model	TF-650	TF-650R	AT-30ER
药箱容量Tank capacity (L)	50	50	30
工作压力Work pressure (bar)	5-25	5-25	5-25
吸水量Suction volume (L)	10	10	10
喷雾量Spray volume (L/min)	3-8	3-8	3-8
净重Net weight (kg)	主机Main engine 9.5 药箱和轮子Tank and wheel 22	主机Main engine 11 药箱和轮子Tank and wheel 22	主机Main engine 6 药箱和轮子Tank and wheel 15
包装尺寸Packing meas (cm)	主机Main engine 35x31x33 药箱和轮子Tank and wheel 88x44x58	主机Main engine 54.5x34.5x37.5 药箱和轮子Tank and wheel 88x44x58	主机Main engine 30x31x27 药箱和轮子Tank and wheel 69x47x46



3WF-2.6



3WF-3



3WF-5

技术参数 SPECIFICATION

型号Model	3WF-2.6	3WF-3	3WF-5
配套动力Mating Power	1E40FP-3Z	1E40FP-3Z	1E52F
排量Displacement (cc)	42.7	42.7	77
额定功率Rated power (kw)	1.8/6500rpm	2.13/7500rpm	3.6/6500rpm
药箱容量Tank capacity (L)	14	14	17
射程Range (m)	≥12	≥12	≥15
净重Net weight (kg)	10.5	11	12
包装尺寸Packing measurement (cm)	53x44x68	52x43x72	51x37.5x75.5

MIST-DUSTER





POWER SPRAYER



TF-22C₃



TF-22C₂



TF-45C₁



TF-22C₃A



TF-22C₂A



TF-45C₁A



TF-50C



TF-70C

TF-70WT



TF-100

TF-100WT

技术参数 SPECIFICATION

型号Model	TF-22C2(A)	TF-22C3(A)	TF-45C1(A)	TF-50C	TF-70C(WT)	TF-100(WT)
柱塞数x直径x行程Plunger no.x dia x stroke(mm)	3x22x16	3x22x16	3x30x20	3x28x28	3x32x34	3x38x38
柱塞长度Plunger length (mm)	129	129	140	134	142/147	161
喷雾压力Spraying pressure (kg/cm ²)	20-40	20-40	20-40	20-40	20-50	20-50
吸水量Suction volume (L/min)	9-22	9-22	21-42	26-51	41-70	64-103
转速Speed (rpm)	500-1200	500-1200	500-1000	500-1000	500-850	500-800
配套动力Mating Power (hp)	1.5-2.5	1.5-2.5	4-5.5	3.5-6	7-9	8-10
净重Net weight (kg)	9.2	9.2	12	18	19	32
包装尺寸Packing measurement (cm)	36.5x28x33(30)	36.5x28x33(30)	42x31x35(32)	45.5x32x39	45.5x32.5x41.5	51x37x51



POWER SPRAYER



TF-22(A)/168F/US

TF-45(A)/168F/US



TF-22(A)/168F/UF

TF-45(A)/168F/UF



TF-22(A)/168F/RH

TF-45(A)/168F/RH

技术参数 SPECIFICATION

型号Model	TF-22(A)/168F/US TF-45(A)/168F/US	TF-22(A)/168F/UF TF-45(A)/168F/UF	TF-22(A)/168F/RH TF-45(A)/168F/RH
高压管长度Hose length (M)	/	/	50
配套动力Mating power	168F	168F	168F
净重Net weight (kg)	31/36	32/35	48/51
包装尺寸Packing measurement (cm)	90x37.5x41	87x37.5x50	119.5x43.5x43



TF-22(A)/168F-50 (XY-50)



TF-22(A)/168F-120 (XY-120)



TF-22(A)/168F-200 (XY-200)



TF-45(A)/168F-300 (XY-300)

技术参数 SPECIFICATION

型号Model	TF-22(A)/168F-50 (XY-50)	TF-22(A)/168F-120 (XY-120)	TF-22(A)/168F-200 (XY-200)	TF-45(A)/168F-300 (XY-300)
药箱容量Tank capacity	50	120	200	300
高压管长度Hose length (M)	20	50	50	50
配套动力Mating Power	168F	168F	168F	168F
净重Net weight (kg)	主机Main engine 29	主机Main engine 29	主机Main engine 29	主机Main engine 29
	药箱和轮子Tank and wheel 32	药箱和轮子Tank and wheel 75	药箱和轮子Tank and wheel 78	药箱和轮子Tank and wheel 110
包装尺寸Packing meas (cm)	主机Main engine 78x33x38 药箱和轮子Tank and wheel 110x54x57	主机Main engine 78x33x38 药箱和轮子Tank and wheel 116x70x85	主机Main engine 78x33x38 药箱和轮子Tank and wheel 119x70x85	主机Main engine 78x33x38 药箱和轮子Tank and wheel 114x85x108



THERMAL FOGGER



6HYC25M-DP



6HYC25M-DS

技术参数 SPECIFICATION

型号Model	6HYC25M-DP	6HYC25M-DS
药箱容量Chemical tank capacity (L)	6	6
燃料容量 Fuel tank capacity (L)	1.2	1.2
喷雾量Spray volume (L)	25L/H	25L/H
启动方式Starting method	手动+电动Manual & electric	
净重Net weight (kg)	9.4	9.7
包装尺寸Packing measurement (cm)	109.5x35.5x36.5	109.5x35.5x36.5



HYT-2



HYT-2W

技术参数 SPECIFICATION

型号Model	HYT-2	HYT-2W
容量Tank capacity (L)	2	2 (chemical tank 350ml)
燃料Fuel	丁烷Butane gas	
微粒 Particle (μm)	5-30	
启动方式Starting method	压电陶瓷点火器 Piezoelectric ceramic ignitor	
净重Net weight (kg)	1.4	2.2
包装尺寸Packing measurement (cm)	50x19x36	65x20.5x38.5



GASOLINE ENGINE AND WATER PUMP



TU26



140F



TF168FA



TF168FB

技术参数 SPECIFICATION

型号Model	TU-26	TF-140F	TF-168FA	TF-168FB
缸径x行程Bore x stroke (mm)	33x30	40x30	68x45	68x54
排量Displacement (cc)	26	37.7	163	196
最大功率Max.power output	1hp	1.35hp	5.5hp	6.5hp
额定功率Rated power output	/	1.1hp	4.8hp	5.7hp
点火方式 Ignition system	晶体管点火 Transistor Magneto			
启动方式Starting system	反冲式 Recoil			
机油容量Engine oil capacity (L)	/	0.1	0.6	0.6
燃油容量Fuel capacity (L)	0.6	0.65	3.6	3.6
最低燃油消耗率Min.fuel consumption	480g/kw.h	480g/kw.h	395g/kw.h	395g/kw.h
净重Net weight (kg)	2.5	3.8	14	14
包装尺寸Packing measurement (cm)	26x26x18.5	24.5x21.5x26.5	40x33x36	40x33x36



WP-20



WP-30



WP-10

技术参数 SPECIFICATION

型号Model	WP-10	WP-20	WP-30
流量Flow (m3/h)	15	35	60
扬程Lift(m)	35	30	20
吸程Suction length (m)	10	8	8
出水口径Water outlet dia. (mm)	25	50	80
引擎排量Engine displacement (cc)	26	163	163
动力Mating power	TU-26	168F	168F
净重Net weight (kg)	5	24	26
包装尺寸Packing measurement (cm)	33x25x35	47x38x42	50x39x46.5

高压喷雾枪 POWER SPRAY GUN

- SG-101: 高压直头喷枪 Straight Nozzle 13mmx3ft (90CM)

SG-102: 高压弯头喷枪 Bend Nozzle 13mmx3ft (90CM)

SG-103: 高压直头气流喷枪 Air-turbulent straight Nozzle 13mmx3ft (90CM)

SG-104: 高压弯头气流喷枪 Air-turbulent bend Nozzle 13mmx3ft (90CM)

SG-105: 高压直头喷枪 Straight Nozzle 13mmx2ft (60CM)

SG-106: 高压直头喷枪 Straight Nozzle 13mmx1.5ft (46CM)

SG-107: 高压直头喷枪 Straight Nozzle 13mmx1ft (31CM)

SG-201 高压宽幅远程喷枪 16mmx3ft (90CM)

SG-204 伸缩式高压喷枪 13-16mmx4ft (122CM)

SG-205 高压直头喷枪 19mmx4ft (122CM)

SG-206 高压直头喷枪 19mmx3ft (90CM)

SG-208 可弯曲气流喷枪 13mmx3ft (90CM)

SG-209 可弯曲气流喷枪 13mmx2ft (60CM)

SG-211 高压直头喷枪 19mmx4ft (122CM)

SG-212 高压远程直射喷枪 13(16)mmx3ft (90CM)

SG-213 高压远程直射喷枪 13(16)mmx1.5ft (46CM) (长度可定制)

高压线型喷杆 POWER SPRAY FAN NOZZLE

- SG-502

SG-503

SG-504

SG-505

高压喷雾枪 POWER SPRAY GUN

- SG-301

SG-302

SG-303

SG-400

SG-402

SG-403

SG-404

SG-405

CG-16

CG-16A

CG-17A

CG-19

调压总成 REGULATOR (MANUAL & AUTOMATIC)

- RM-01
(TF-22C2/C3/45C1)

RM-02
(TF-50C/70C)

RM-04
(TF-22C1)

RM-05
(TF-22C1)

RA-02
(TF-22C3A)

RA-03
(TF-45C1A)

RA-04
(TF-50CA/70CA)

- 球阀开关
BC-301
ZG1/4-19XG1/4-19

球阀开关
BC-302
ZG1/4-19X13.8-18

球阀开关
BC-303
13.8-18X13.8-18

球阀开关
BC-303A
13.8-18X13.8-18

球阀开关
BC-304
ZG1/4-19-13.8-18

球阀开关
BC-306
9/16-18X9/16-18

球阀开关
BC-307
13.8-18X13.8-18
9/16-18X9/16-18

球阀开关
BC-308
ZG1/2-14XG1/2-14

球阀开关
BC-309
G1/2-14XG1/2-14

球阀开关
BC-310
ZG1/4-19x13.8-18

球阀开关
BC-311
G3/8-22x1.5
ZG1/4-19xG1/2-14

胶管接头
HC-401
Simple connector
for 8.5mm hose

胶管接头
HC-402
Butterfly nut
for 8.5mm hose

胶管接头
HC-403
Hexagon.Nut for
8.5mm hose.

胶管接头
HC-404
Hexagon.Nut for 10mm
hose. 3/8"PS

胶管接头
HC-405
Hexagon.Nut for 13mm
hose. 1/2"PS

胶管接头
HC-406
Barbed crosses
for 8.5mm hose

胶管接头
HC-407
Barbed branch tee
for 8.5mm hose

胶管接头
HC-408
M/female tee
forged body

转动接头
HT-401 13.8-18
(for 8.5mm hose)

90°转动接头
HT-421 13.8-18
G1/2-14

快换接头
HT-502 13.8-18
(for 8.5mm hose)

两角螺帽斜口
SP-502
Male joint

黄油环
SP-503
Grease ring

黄油杯
SP-504
Grease cup

皮带轮
SP-505 V-Pulley

空气室
SP-506 Air-chamber

压力表(圆)
SP-507
Pressure gauge

压力表(直)
SP-508
Pressure gauge

曲轴
SP-509
Crank shaft

柱塞
SP-510 Plunger

连杆
SP-511
Rod(complete)

吸水滤网
SP-512 Strainer

过滤网
SP-512a Strainer

调压螺丝
SP-513
Regulating screw

活接
SP-533 (HJ13.8)
Swivel connector 13.8-18

探油镜
SP-520
Oil gauge

活门迫紧
SP-521
Valve packing

V迫紧
SP-522
V-packing

活门组
SP-517
Valve assy

加油盖
SP-518
Oil filling cover

活接
SP-534 (HJ1/2)
Swivel adaptor G1/2

机架
SP-523 Frame

机架
SP-523US Frame

卷管架
SP-525
Hose reel (max capacity
Ø13mm hose 100m)

高压喷雾管
SP-526
High pressure hose(50/100M)

内转换接头
SP-535
Adaptor G1/2x13.8-18

1.2米高压喷雾管
SP-528
Spray hose 8.5mmx1.2m

1.2米喷雾管(带转动接头)
SP-529
Spray hose 8.5mmx1.2m

管束
SP-530
Ferule

回水管组
SP-531
Overflow hose

吸水管组
SP-532
Suction hose

转换接头
SP-536
Adaptor G1/2x9/16-18
G1/2x13.8-18

铸铁皮带盘
SP-550
Iron pulley 3.5"

铝制皮带盘
SP551
Allu. pulley 3.5"

铝制皮带盘
SP-552
Allu. pulley 2.5"xφ20
2.5"xφ19

铸铁皮带盘
SP553
Iron pulley 2.5"xφ20
2.5"xφ19

铸铁皮带盘
SP554 (screw type)
Iron pulley 2.5"xφ19

8.5mm胶管扣压机
SP-527
Hose binder


喷杆系列

SPRAY LANCE



防护罩系列

PROTECTION HOOD

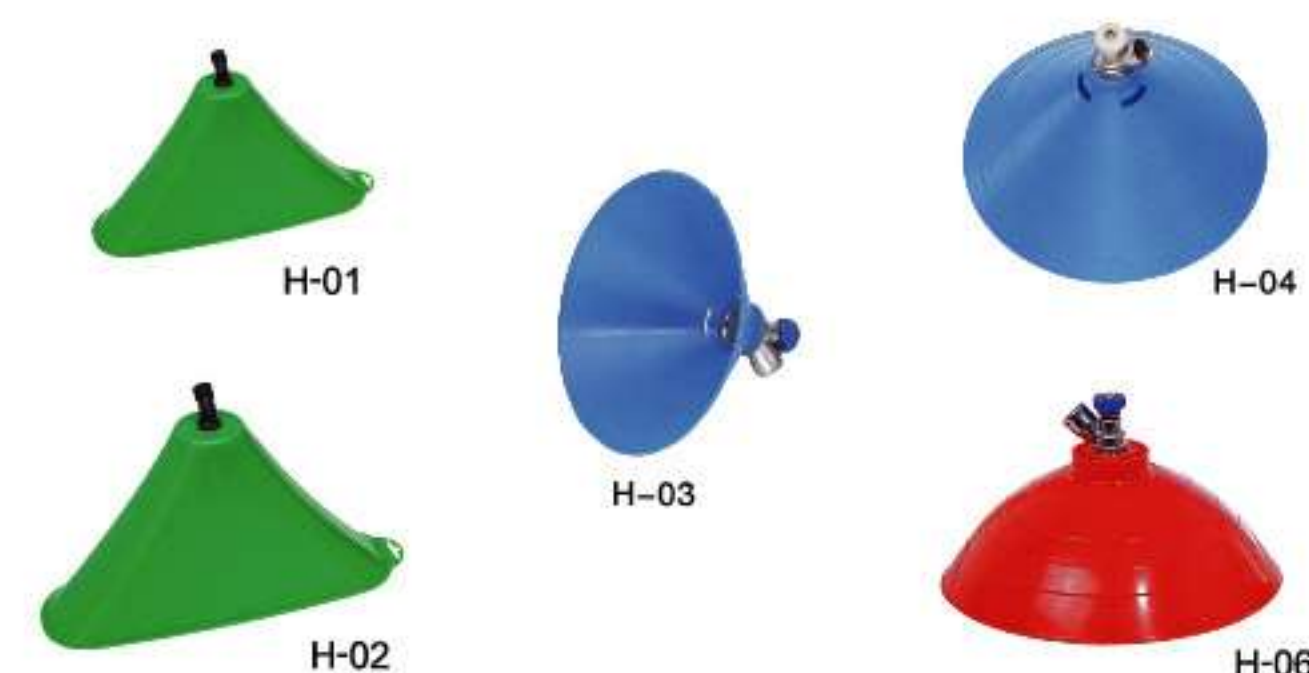

喷头系列

SPRAY NOZZLE



开关系列

MANUAL COCKS



喷头系列

SPRAY NOZZLE



CCC UL CE ISO9001 ISO14001



DIAPHRAGM PUMPS
TRACTOR SPRAYERS



技术参数 SPECIFICATION

型号Model	DMB1	MBD1.5 MBD1.5/18	MBD2.6 MBD3 MBD3/18	DMB3	DMB5/12 DMB6/12 DMB7/12
转速Speed (rpm)	1350	2750	3500	3000	2600
流量Flowrate (L/Min)	1~1.3	1.5~2.0	2.6~3/3~3.3	2.3~2.8	5/6/7
电压Voltage (V)	6	12/18	12/18	12	12
电流Current (A)	≤1.2	≤1.5/1.3	≤1.8/2.4	≤1.8	≤7.5/8.5/9.5
工作压力Working pressure	2.8~3.2bar	3~3.8/3~4.5bar	3~3.8/6~7bar	2.8~3.8bar	3~4bar
进出水口Inlet/Outlet	外螺纹OD M18x1.5	外螺纹OD M18x1.5	外螺纹OD M18x1.5 斜口9.5 外螺纹OD M18x1.5/斜口9.5	斜口 9.5	内螺纹 ID G3/8-19 内螺纹 ID NPT3/8-18
净重Net weight (kg)	0.6	0.59	0.59	0.6	2.15
外形尺寸Dimension(mm)	152x70x54	166x87x65	166x87x65	148x93x60	212x102x102



GMB20



GMB30



GMB30TY



GMBF30TY

技术参数 SPECIFICATION

型号Model	GMB20	GMB30	GMB30TY	GMBF30TY
转速Speed (rpm)	650	550	550	550
流量Flowrate (L/Min)	20	35	35	35
配套功率Mating power(hp)	1	3	3	3
工作压力 Working Pressure (bar)	20	40	40	40
缸数 Cylinders (pcs)	2	2	2	2
中心高 Center height(mm)	74	98	98	98
净重Net weight (kg)	4	8.7	9.7	12.5
外形尺寸Dimension(mm)	230×200×227	242×181×330	242×290×326	400×242×326



MB54



MBS54



GMB55
GMB65



GMB81



GMB110
GMB130
GMB150



GMB185
GMB215
GMB250

技术参数 SPECIFICATION

型号Model	MB54	MBS54	GMB55/65	GMB81	GMB110/130/150	GMB185/215/250
转速Speed (rpm)	550	550	550	550	550	550
流量Flowrate (L/Min)	54	54	58/65	78	110/125/140	185/215/250
配套功率Mating power(hp)	6	6	6	9.5	10/12/14	9/10/11
工作压力 Working Pressure (bar)	40	40	40	40	40	20
缸数 Cylinders (pcs)	3	3	3	3	3	6
中心高 Center height(mm)	121	121	132	155	194	200
净重Net weight (kg)	12.5	13	16	20	38.5	38
外形尺寸Dimension(mm)	236×270×264	236×270×264	315×278×278	415×295×336	417×376×447	388×410×474



FXS8/680



FXS7/340



FXS7A/340



FXS8B/680

FEATURES:

- Diaphragm pump
- Anti-drip brass double nozzle
- Hand-washing tank (capacity 10L/15L)
- Circuit-rinsing tank (capacity 40L/80L)
- Outside transparent level gauge
- Suction filter with check-valve.
- Hydraulic liquid stirrer
- Control unit with pressure regulator
- Clutch for ventilation fan gear box
- Hot galvanized frame

主要特点

- 隔膜泵
- 防滴铜喷头
- 洗手箱 (容量10L,15L)
- 清洗箱 (容量40L,80L)
- 外置透明液位管
- 带截止阀吸水滤网
- 液压药液搅拌器
- 可调压控制阀
- 风扇变速箱离合器
- 热镀锌机架

技术参数 SPECIFICATION

型号Model	FXS7/340	FXS7A/340	FXS7/440	FXS7A/440	FXS7/680	FXS7A/680	FXS8/680	FXS8A/680	FXS8B/680	FXS8/880	FXS8A/880	FXS8B/880
配套动力Mating Power	≥35hp	≥35hp	≥35hp	≥35hp	≥50hp	≥50hp	≥50hp	≥50hp	≥50hp	≥75hp	≥75hp	≥75hp
药箱容量Chemical Tank Capacity	300L	300L	400L	400L	600L	600L	600L	600L	600L	800L	800L	800L
喷雾幅度Spray range	≥10m	≥10m	≥10m	≥10m	≥10m	≥10m	≥10m	≥10m	≥10m	≥10m	≥10m	≥10m
喷头数量Nozzles	10pcs	10pcs	10pcs	10pcs	10pcs	10pcs	12/12/14pcs	12/12/14pcs	12/12/14pcs	12/12/14pcs	12/12/14pcs	12/12/14pcs
液泵流量Pump flowrate	78L/min	78L/min	78L/min	78L/min	78L/min	78L/min	78L/min	78L/min	78L/min	78L/min	78L/min	78L/min
工作压力Working pressure	0.4MPa	0.4MPa	0.4MPa	0.4MPa	0.4MPa	0.4MPa	0.4MPa	0.4MPa	0.4MPa	0.4MPa	0.4MPa	0.4MPa
风扇直径Ventilation fan dia.	700mm	700mm	700mm	700mm	700mm	700mm	800mm	800mm	800mm	800mm	800mm	800mm
净重Net weight (kg)	190	195	266	270/309	266	270/309	266	270/309	266	280/317	280/317	280/317
外形尺寸Dimension (cm)	130x100x127	130x100x127	130x100x150	130x100x150	150x136x136	150x136x136	150x136x136	163x143.5x140.5	150x136x160	150x136x160	163x143.5x1600	163x143.5x1600



FXL7B/18/340



FXL7B/18/680

技术参数 SPECIFICATION

型号Model	FXL7B/18/340	FXL7B/18/440	FXL7B/18/680	FXL7B/18/880
配套动力Mating Power	≥35 hp	≥35 hp	≥50hp	≥75hp
药箱容量Chemical Tank Capacity	300L	400L	600L	800L
液泵流量Pump flowrate	78 L/min	78 L/min	78 L/min	78 L/min
工作压力Working pressure	0.4 MPa	0.4 MPa	0.4 MPa	0.4 MPa
侧风道高度Height of air duct	180cm	180cm	180cm	180cm
风机直径Ventilation fan dia.	700mm	700mm	700mm	700mm
喷头数 Nozzle number	14	14	14	14
净重Net weight (kg)	256	261	338	345
外形尺寸Dimension (cm)	131x110x184	131x110x184	152x136x192	152x136x192



XQJ50/340



XGT12/340

技术参数 SPECIFICATION

型号Model	XQJ50/340	XQJ100/440	XQJ30/13/680	XGT12/340
配套动力Mating Power	≥35hp	≥35hp	≥50hp	≥35hp
药箱容量Chemical Tank Capacity	300L	400L	600L	300L
液泵流量Pump flowrate	78 L/min	78 L/min	78 L/min	78 L/min
工作压力Working pressure	0.4MPa	0.4MPa	0.4MPa	0.4MPa
喷管长度Hose length	50m(8.5mm)	100m (8.5mm)	30m (13mm)	Boom 1.2m×2
净重Net weight (kg)	117	121	197	150
外形尺寸Dimension (cm)	117x100x126	117x100x150	125x136x136	104x100x140



FQS6A/600



FQS7/1000A



FQS8/2000



技术参数 SPECIFICATION

型号Model	FQS6A/600	FQS7/1000A	FQS8/1000A	FQS8/2000	FQS82/2000	FQS9A2/2000
配套动力Mating Power	≥15 hp	≥35 hp	≥35 hp	≥50 hp	≥50/75 hp	
药箱容量Chemical Tank Capacity	600L	1000L	1000L	2000L	2000L	
喷雾幅度Spray range	≥10m	≥10m	≥10m	≥10m	≥10m	
喷头数量Nozzles	10pcs	10pcs	12pcs	12pcs	12pcs	
液泵流量Pump flowrate	78L/min	125(140)L/min	125(140)L/min	125(140)L/min	125(140)L/min	
工作压力Working pressure	0-4MPa	0-4MPa	0-4MPa	0-4MPa	0-4MPa	
风机直径Ventilation fan dia.	600mm	700mm	800mm	800mm	800/900mm	
齿轮箱挡数Multiplier gear	1	1	1	1	2	
净重Net weight (kg)	305	428	441	635	682/699	
外形尺寸Dimension (cm)	212x100x136	236x137x146	251x137x146	349x152x171	350x152x171	354x152x171



PXX8/340



PXI10/440



PXI12B/680



技术参数 SPECIFICATION

型号Model	PXX6/340	PXX8/340	PXI10/440	PXI12B/680
	PXX6/440	PXX8/440	PXI10/680	PXI12B/880
		PXX8/680		
配套动力Mating power	≥35hp	≥35/35/50hp	≥50hp	≥50hp/75hp
药箱容量Chemical tank capacity	300L/400L	300L/400L/600L	400L/600L	600L/800L
喷杆喷幅Boom length	6m	8m	10m	12m
喷头数量Nozzles Number	12pcs	16pcs	20pcs	24pcs
液泵流量Pump flowrate (L/min)	58/78	78	78	78
折叠、升降Fold/lift	手动Manual	手动Manual	手动Manual	手动Manual
平衡机构Balance system	/	/	/	有Yes
减震系统Shock absorption system	/	/	/	有Yes
净重Net weight (kg)	160 /165	166/170/180	175/200	380/388
外形尺寸Dimension(cm)	211x151x122	211x181x122	211x175x122	279x184x142
		235x181x139	211x161x139	279x184x142



PXL22/1200



PQL18/3000



技术参数 / SPECIFICATION

型号Model	PXL22/1200	PQL18/3000	PQL22/3000
配套动力Mating power	≥90hp	≥50hp	≥50hp
药箱容量Chemical tank capacity	1200L	3000L	3000L
喷杆长度Boom length	22m	18m	22m
喷头数量Nozzles Number	44pcs	36pcs	44pcs
液泵流量Pump flowrate (L/min)	215	215	215
折叠、升降Fold/lift	液压Hydraulic	液压Hydraulic	液压Hydraulic
平衡机构Balance system	有Yes	有Yes	有Yes
减震系统Shock absorption system	有Yes	有Yes	有Yes
净重Net weight (kg)	965	2390 kg	2200 kg
外形尺寸Dimension(cm)	345x393x260	568x272x333	659x265x333



MPF20/152



UPM30



AT-30M3



TPM100/20F



TPM100/20D



TPM200/30

技术参数 / SPECIFICATION

型号Model	MPF20/152	UPM30	AT-30M3	TPM100/20F	TPM100/20D	TPM200/30
药箱容量Chemical Tank Capacity	/	/	30L	100L	100L	200L
液泵流量Pump flowrate	20L/min	35L/min	2.3-2.8L/min	20L/min	20L/min	35L/min
工作压力Working pressure	20bar	40bar	2.8-3.8bar	20bar	20bar	40bar
喷管长度Hose length	/	/	10m	30m	30m	50m
配套动力Mating power	152F	168F	12V motor	152F	1.1Kw,220V motor	168F
净重Net weight(kg)	18	33	21	49.5	51	78
包装尺寸Packing meas (cm)	51x30.5x40	66x40x46	69x47x43	108x71x95.5	108x71x90	127x76x95